

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)


PCT

(10) International Publication Number
WO 2004/018924 A1

- (51) International Patent Classification⁷: **F16L 53/00**
- (21) International Application Number:
PCT/GB2003/003350
- (22) International Filing Date: 1 August 2003 (01.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0219373.8 20 August 2002 (20.08.2002) GB
- (71) Applicant (for all designated States except US): **HEAT-SAFE CABLE SYSTEMS LTD** [GB/GB]; Cromwell Road, Bredbury, Stockport, Cheshire SK6 2RF (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **O'CONNOR, Jason, Daniel, Harold** [GB/GB]; 2 Kestral View, Simmondley, Glossop, Derbyshire SK13 6QE (GB). **MALONE, Neil** [GB/GB]; c/o Heat Trace Limited, Cromwell Road, Bredbury, Stockport SK6 2RF (GB).
- (74) Agent: **PARKINSON, Neil, Scott; Marks & Clerks**, Sussex House, 83-85 Mosley Street, Manchester M2 3LG (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: HEATED CONDUIT

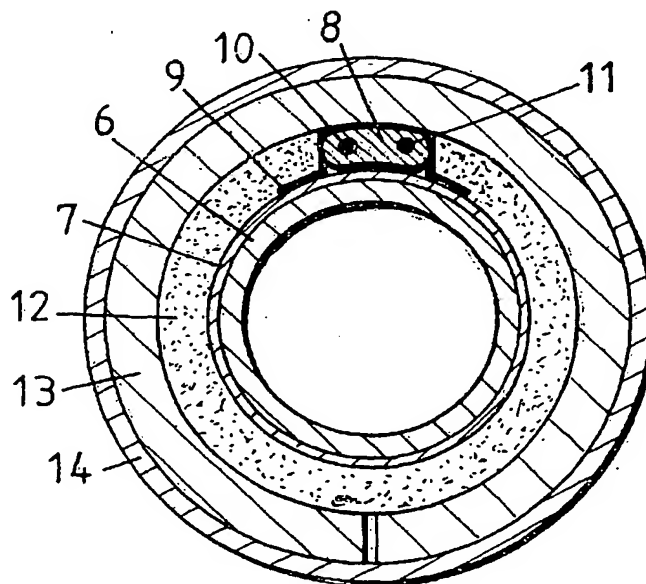

(57) Abstract: A conduit comprising a pipe, an electrical heater extending along the length of the pipe, and a thermally insulating jacket extending around the pipe and heater. The pipe comprises a plastic inner tube. The plastic inner tube is received within a deformable metal tube such that the plastics inner tube and deformable metal tube form a composite double-walled structure.

WO 2004/018924 A1